





Copper Foil Tape

Description

Naikos copper foil tape consisting a copper foil backing coated with conductive or non-conductive acrylic pressure sensitive adhesive. It shows great conductivity performance and EMI shielding for various applications.

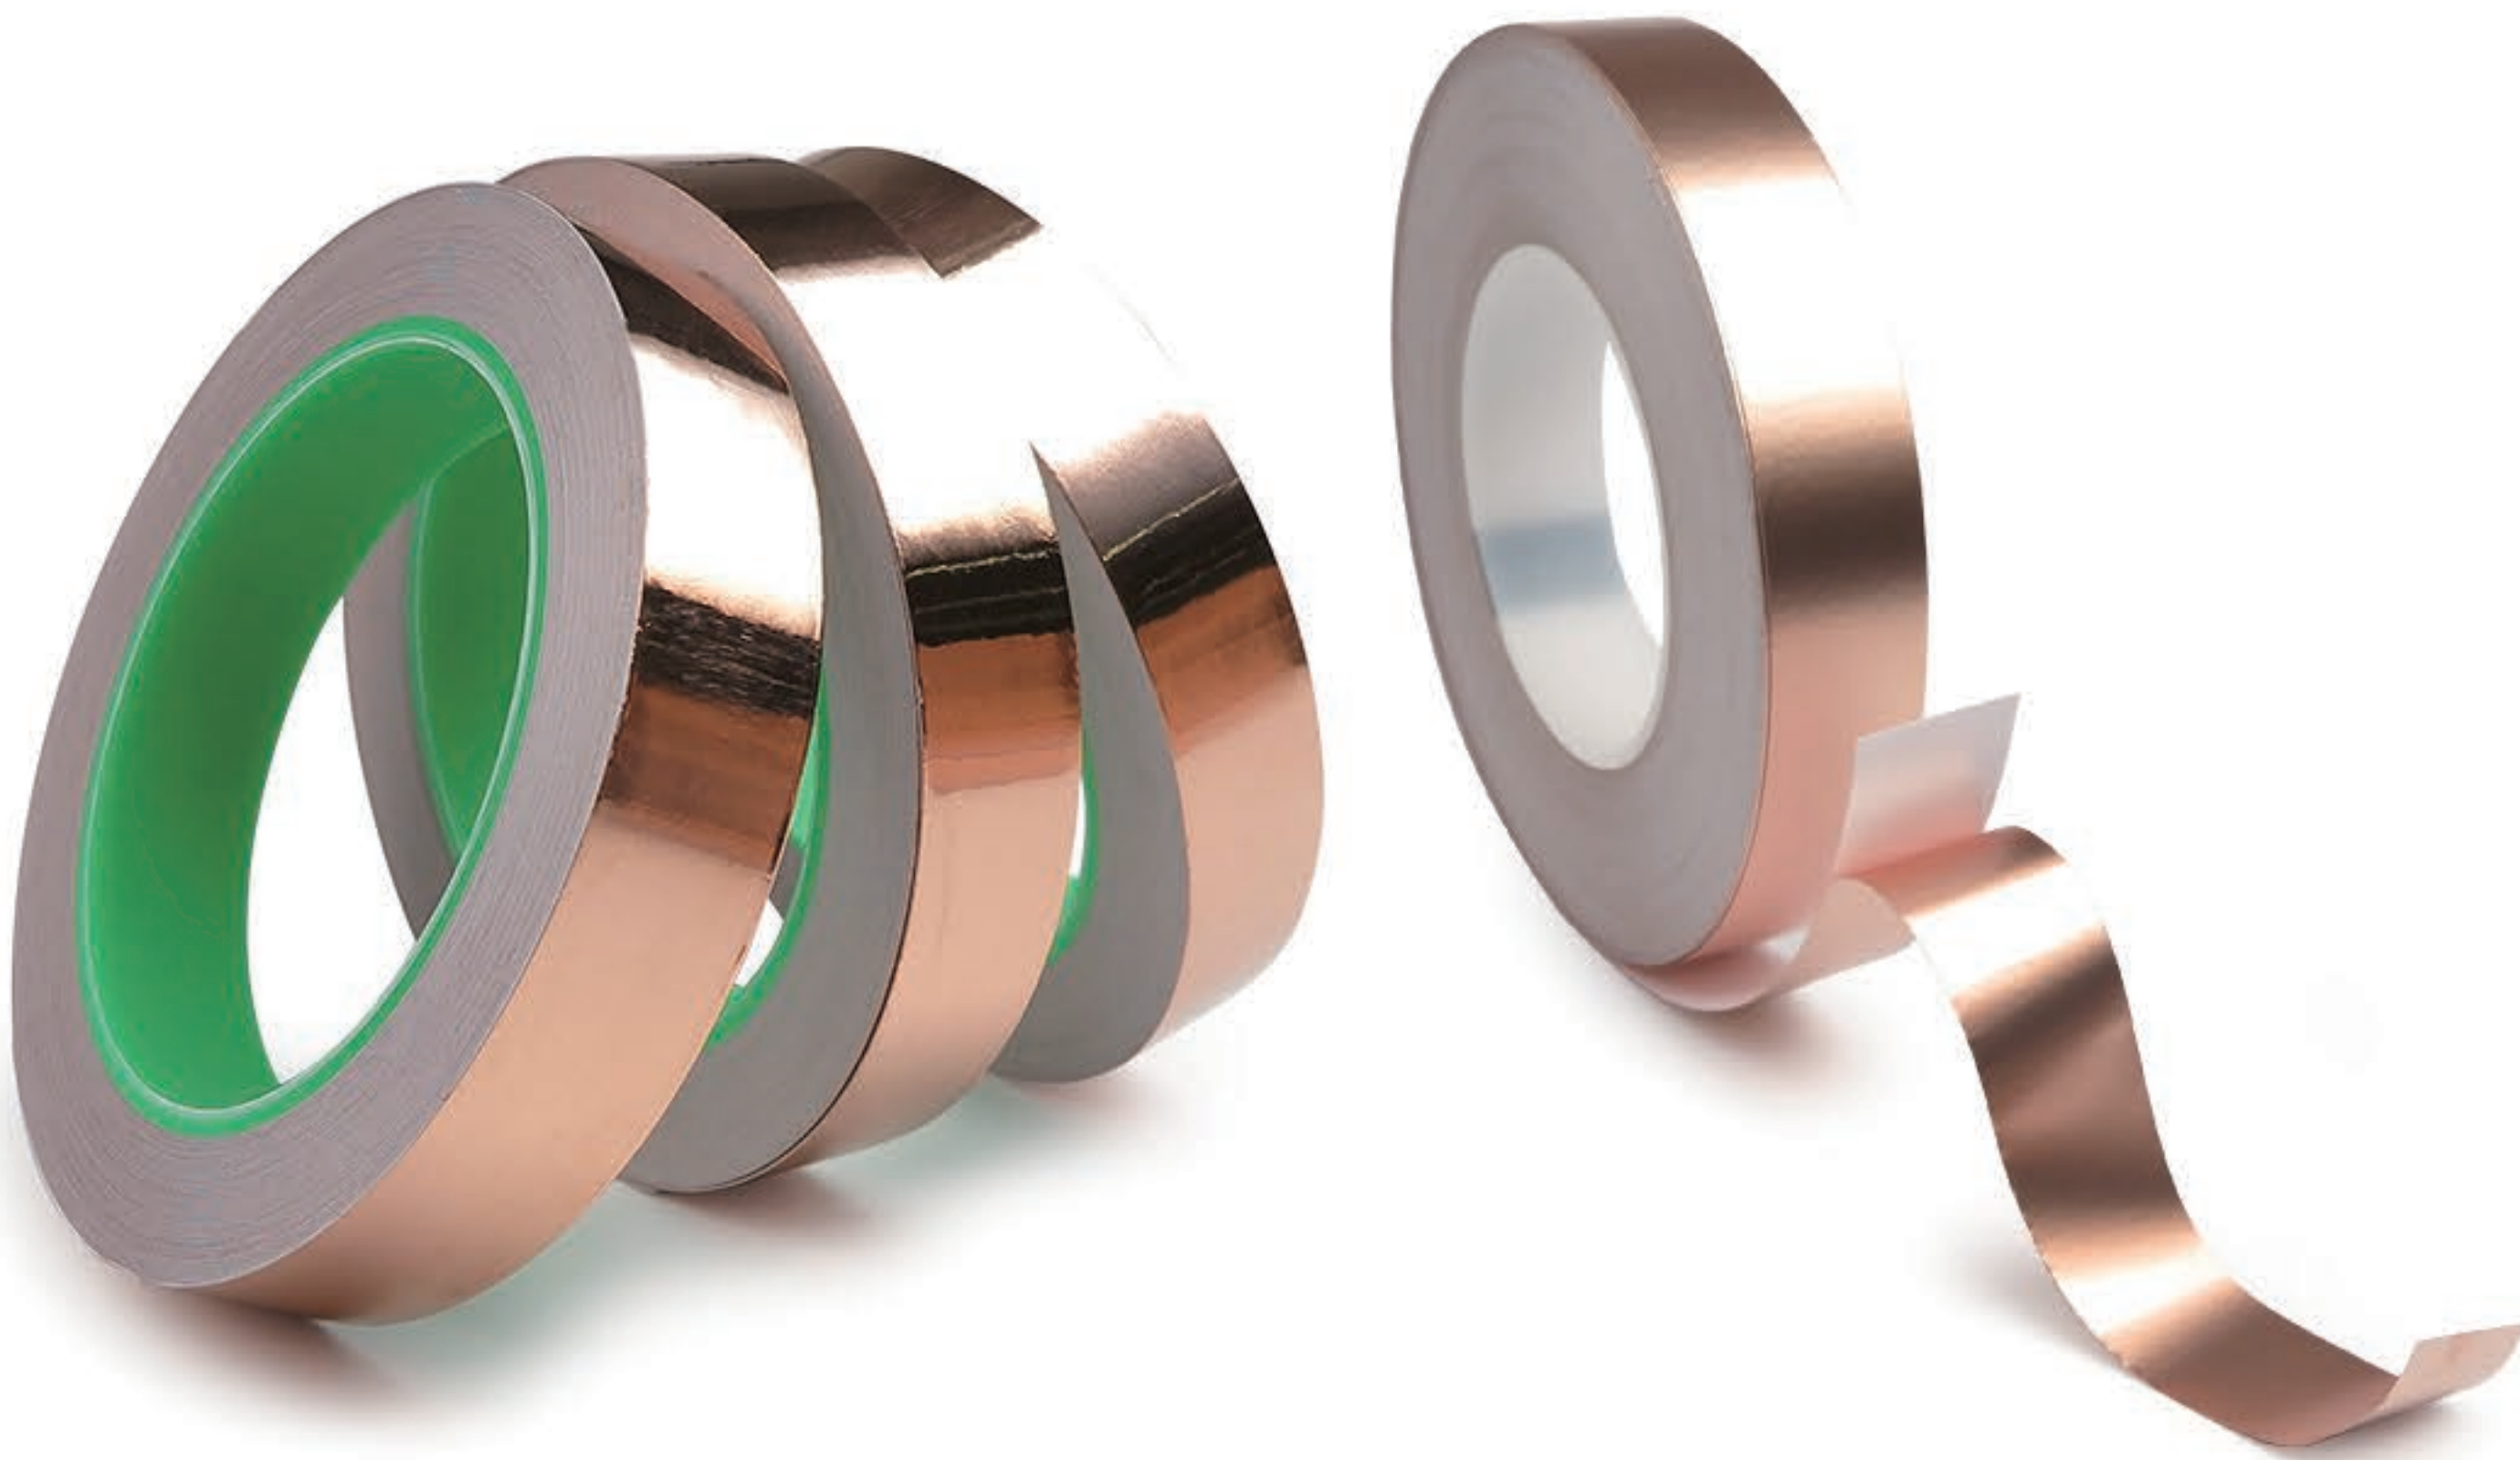

Construction

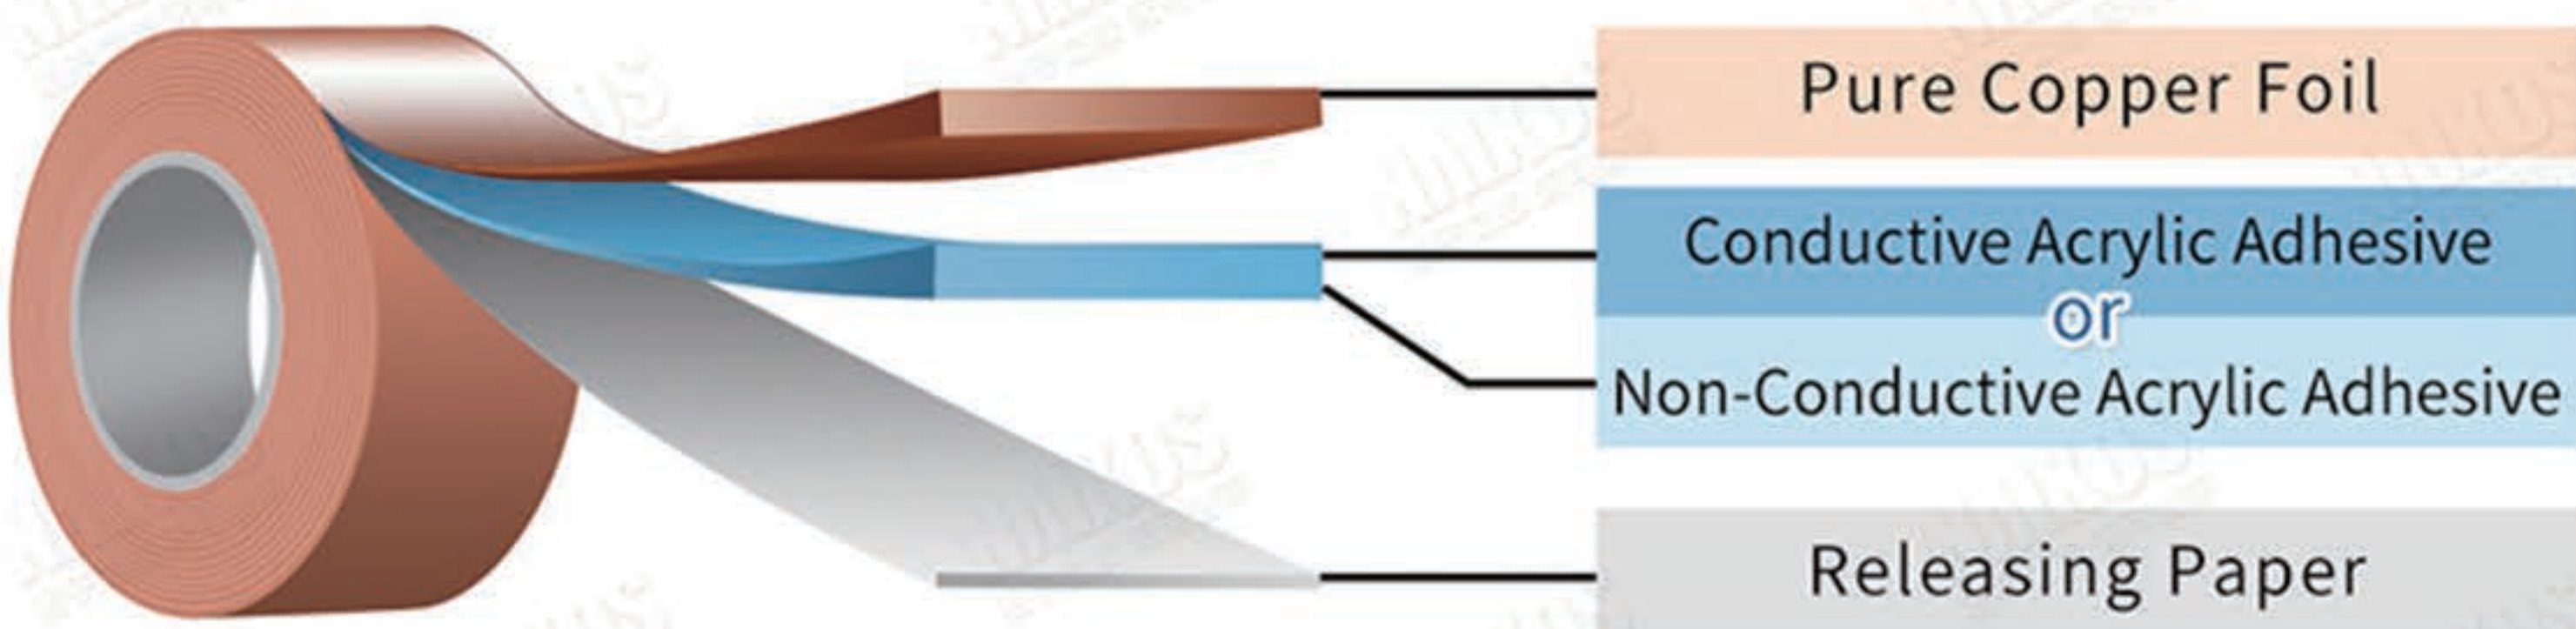


Features


- * High conductivity
- * Slug repellent
- * EMI shielding
- * Soldering safe

Application

- * Eliminate the effect of EMI
- * Transformer
- * Mobile phone
- * Tiffany lamp
- * Fridge, air conditioner

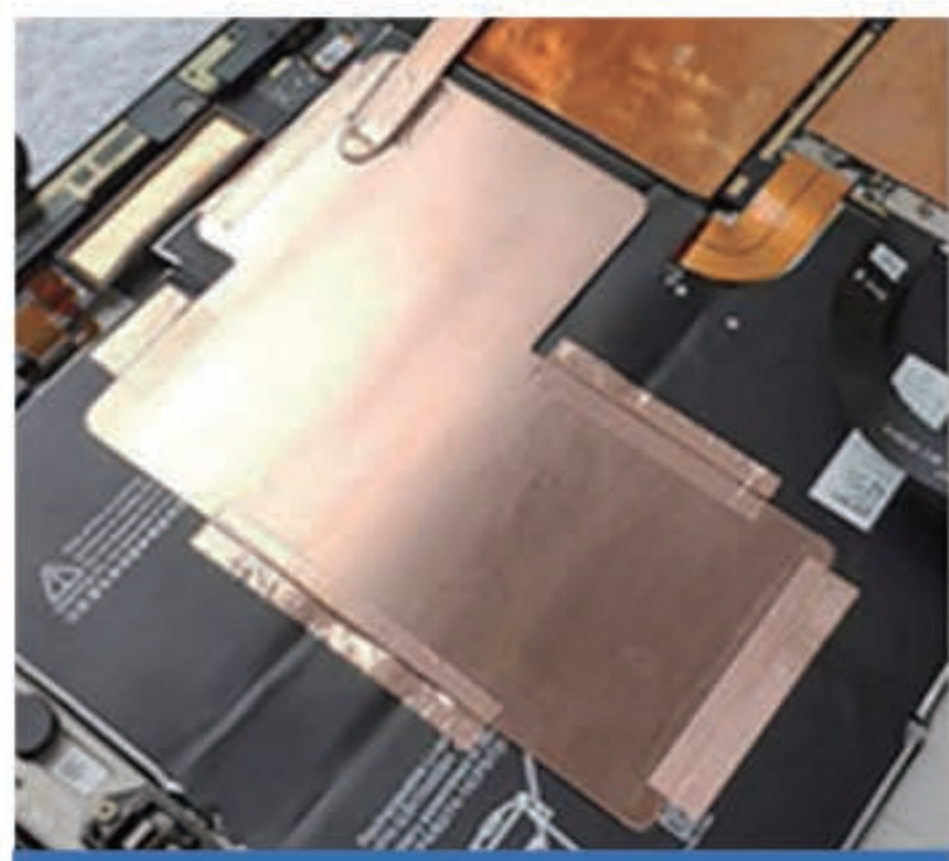

Electrical Repairs

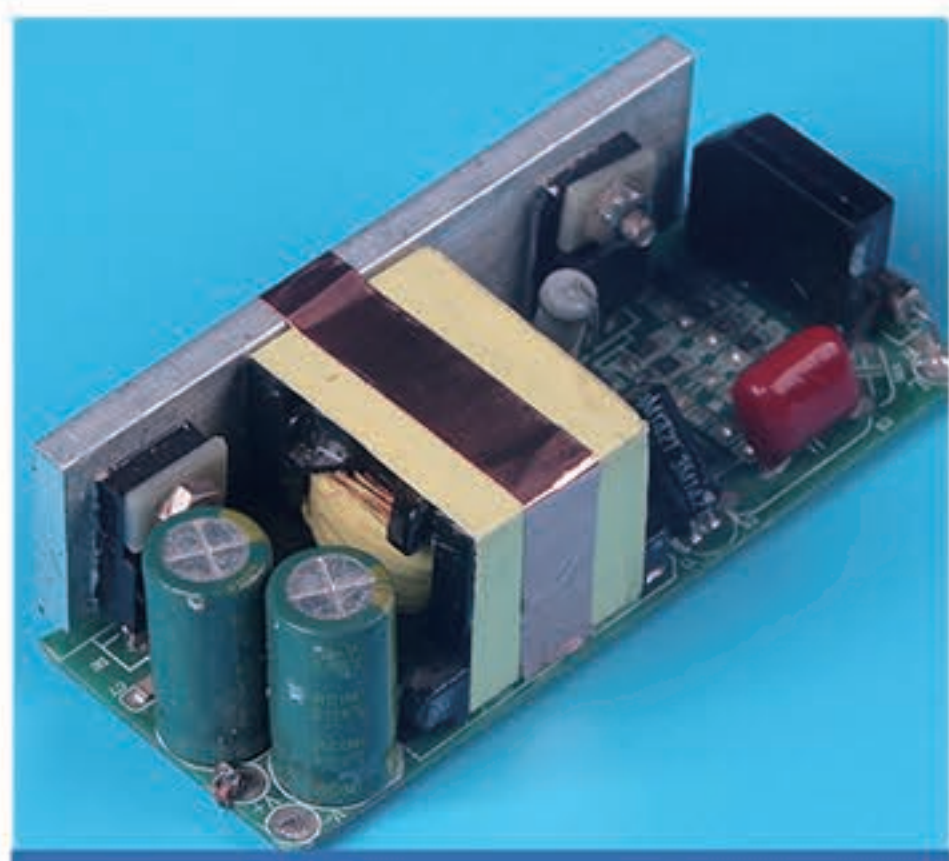

PCB Collector Materials



Guitar Circuit Bin Shielding



Device EMI Shielding



Prevent The Snails



Handicraft Welding

Properties

Item	NKS-CA###	NKS-NA###
Carrier	Copper Foil	Copper Foil
Total Thickness	0.05~0.18 mm(2~7.2 mil)	0.05~0.18 mm(2~72 mil)
Color	Copper	Copper
Adhesive	Conductive PSA	Non Conductive PSA
Adhesion to Stainless Steel	> 10 N/25mm(> 35.3 oz/inch)	> 10 N/25mm(> 35.3 oz/inch)
Temperature Resistance	-20~+120 °C(-4~+248 °F)	-20~+120 °C(-4~+248 °F)